



TRADITIONAL BULKHEADS



BULKHEADS TRADITIONAL LIGHTING



BELVIDERE
T206/T208



EMPIRE MINI
T221/T223



WESTCLIFF
T209/T211



EDGECOMBE
T215/T217



HARROW
T203/T205



WESTCLIFF MINI
T212/T214



EMPIRE
T218/T220



SEDGEFIELD
T201/T202



YORK
C337





BELVIDERE

MODEL NUMBER

- T206 - BELVIDERE ALUMINIUM REFLECTOR
- T208 - BELVIDERE BRASS DISC

SPECIFICATIONS

HOUSING : LM 6 die cast aluminium.

LIGHT SOURCE : The fitting is designed to operate a range of Compact Fluorescent lamps up to 26W or ES LED lamps.

DIFFUSER : Standard frosted glass. Special clear glass or sandblasted glass.

REFLECTORS : Aluminium or brass disc.

FINISH : Powder coated and paint technique.

MOUNTING : Wall mounted.

CONTROL GEAR : Electronic or magnetic control gear. The electronic supply is suitable for operation with 220 – 240 volts. 50 hertz single phase.

FASTENERS : All external screws are stainless steel.

INGRESS PROTECTION : IP 44.

MECHANICS : Operating Temperature (T_a) ≤ 36° C.
Weight : 2.4 Kg including control gear.




Belvidere Frosted Glass

LIGHT SOURCE


Lamp	Wattage	Base
LED	Lamp specification	ES
CFL	13W, 18W or 23W	E27
	13W, 18W or 26W	G24

APPLICATION AREAS


Indoor or outdoor application.
Commercial Developments.
Retail Developments.
Shopping malls.
Public buildings.
Residential Developments.



DIMENSIONS IN MM

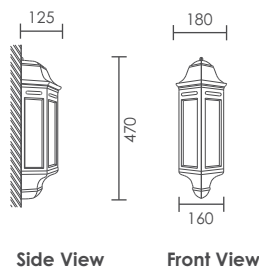

Side View Front View

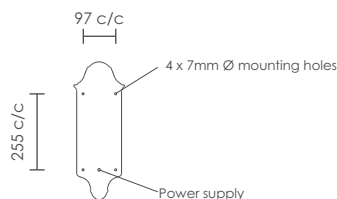

Mounting Plate Detail

COLOURS

- Black (BL)
- White (WH)
- Moss Green (MG)
- Antique Green (AG)
- Antique Gold (AD)
- Antique Silver (AS)
- Antique Copper (AC)



Belvidere Clear Glass





EDGECOMBE



Edgecombe with Frosted Glass

MODEL NUMBER

T215 - EDGECOMBE ALUMINIUM REFLECTOR
T217 - EDGECOMBE BRASS DISC

SPECIFICATIONS

HOUSING : LM 6 die cast aluminium.

LIGHT SOURCE : The fitting is designed to operate a range of Compact Fluorescent lamps up to 18W and ES LED lamps.

DIFFUSER : Standard frosted glass. Special clear glass or sandblasted glass.

REFLECTORS : Aluminium or brass disc.

FINISH : Powder coated and paint technique.

MOUNTING : Wall mounted.

CONTROL GEAR : Electronic or magnetic control gear. The electronic supply is suitable for operation with 220 – 240 volts. 50 hertz single phase.

FASTENERS : All external screws are stainless steel.


INGRESS PROTECTION : IP 44.

MECHANICS : Operating Temperature (T_a) ≤ 36° C.








Weight : 2 Kg including control gear.

APPLICATION AREAS

Indoor or outdoor application.
Commercial Developments.
Retail Developments.
Shopping malls.
Public buildings.
Residential Developments.



COLOURS


-  Black (BL)
-  White (WH)
-  Moss Green (MG)
-  Antique Green (AG)
-  Antique Gold (AD)
-  Antique Silver (AS)
-  Antique Copper (AC)



LIGHT SOURCE


Lamp	Wattage	Base
LED	Lamp specification	ES
CFL	13W or 18W	E27
	13W or 18W	G24

DIMENSIONS IN MM

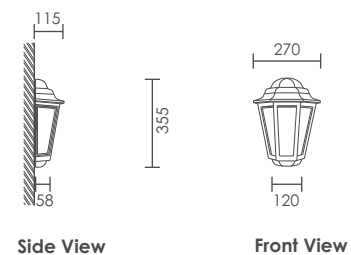

Side View

Front View

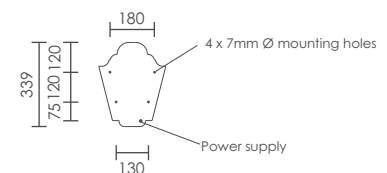

Mounting Plate Detail





EMPIRE

MODEL NUMBER

T218 - EMPIRE ALUMINIUM REFLECTOR
T220 - EMPIRE BRASS DISC

SPECIFICATIONS

HOUSING : LM 6 die cast aluminium.
LIGHT SOURCE : The fitting is designed to operate a range of Compact Fluorescent lamps up to 26W or ES LED lamps.
DIFFUSER : Standard sandblasted glass with clear edge.
REFLECTORS : Aluminium or brass disc.
FINISH : Powder coated and paint technique.
MOUNTING : Wall mounted.
CONTROL GEAR : Electronic or magnetic control gear. The electronic supply is suitable for operation with 220 – 240 volts. 50 hertz single phase.
FASTENERS : All external screws are stainless steel.
INGRESS PROTECTION : IP 44.
MECHANICS : Operating Temperature (T_a) ≤ 36° C.
 Weight : 5.1 Kg including control gear.



Empire Sandblasted Glass with Clear Edge

LIGHT SOURCE


Lamp	Wattage	Base
LED	Lamp specification	ES
CFL	13W, 18W or 23W	E27
	13W, 18W or 26W	G24

APPLICATION AREAS

Indoor or outdoor application.
 Commercial Developments.
 Retail Developments.
 Shopping malls.
 Public buildings.
 Residential Developments.




DIMENSIONS IN MM

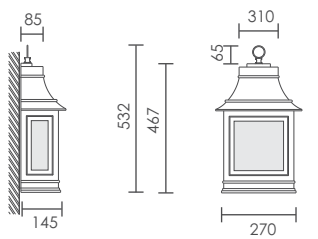

Side View

Front View

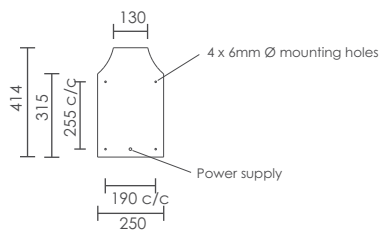

Mounting Plate Detail

COLOURS

-  Black (BL)
-  Antique White (AW)
-  Antique Rust (AR)





EMPIRE MINI



Empire Mini Sandblasted Glass with Clear Edge

MODEL NUMBER


- T221 - EMPIRE MINI ALUMINIUM REFLECTOR
- T223 - EMPIRE MINI BRASS DISC

SPECIFICATIONS

- HOUSING :** LM 6 die cast aluminium.
- LIGHT SOURCE :** The fitting is designed to operate a range of Compact Fluorescent lamps up to 18W or ES LED lamps.
- DIFFUSER :** Standard sandblasted glass with clear edge.
- REFLECTORS :** Aluminium or brass disc.
- FINISH :** Powder coated and paint technique.
- MOUNTING :** Wall mounted.
- CONTROL GEAR :** Electronic or magnetic control gear. The electronic supply is suitable for operation with 220 – 240 volts. 50 hertz single phase.
- FASTENERS :** All external screws are stainless steel.
- INGRESS PROTECTION :** IP 44.
- MECHANICS :** Operating Temperature (T_a) ≤ 36° C.
Weight : 2.1 Kg including control gear.

APPLICATION AREAS

- Indoor or outdoor application.
- Commercial Developments.
- Retail Developments.
- Shopping malls.
- Public buildings.
- Residential Developments.



COLOURS


-  Black (BL)
-  Antique White (AW)
-  Antique Rust (AR)



LIGHT SOURCE


Lamp	Wattage	Base
LED	Lamp specification	ES
CFL	13W or 18W	E27
	13W or 18W	G24

DIMENSIONS IN MM

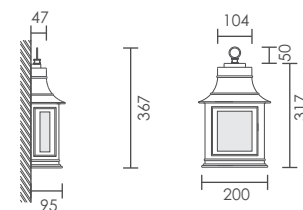

Side View

Front View

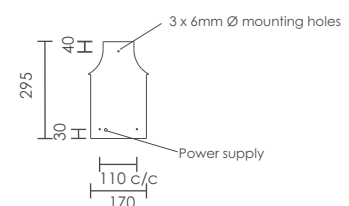

Mounting Plate Detail





HARROW

MODEL NUMBER

T203 - HARROW ALUMINIUM REFLECTOR
T205 - HARROW BRASS DISC

SPECIFICATIONS

- HOUSING :** LM 6 die cast aluminium.
- LIGHT SOURCE :** The fitting is designed to operate a Compact Fluorescent lamp 13W or ES LED lamps.
- DIFFUSER :** Standard frosted glass. Special clear glass or sandblasted glass.
- REFLECTORS :** Aluminium or brass disc.
- FINISH :** Powder coated and paint technique.
- MOUNTING :** Wall mounted.
- CONTROL GEAR :** Electronic or magnetic control gear. The electronic supply is suitable for operation with 220 – 240 volts. 50 hertz single phase.
- FASTENERS :** All external screws are stainless steel.
- INGRESS PROTECTION :** IP 44.
- MECHANICS :** Operating Temperature (T_a) ≤ 36° C.
Weight : 1.4 Kg including control gear.




Harrow Frosted Glass

LIGHT SOURCE



Lamp	Wattage	Base
LED	Lamp specification	ES
CFL	13W	E27
	13W	G24

APPLICATION AREAS

Indoor or outdoor application.
Commercial Developments.
Retail Developments.
Shopping malls.
Public buildings.
Residential Developments.



DIMENSIONS IN MM

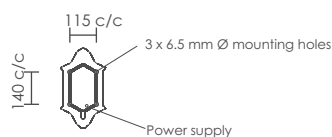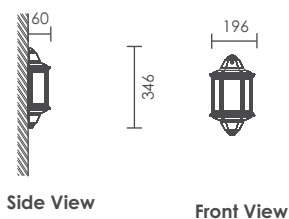

Mounting Plate Detail

COLOURS

- Black (BL)
- Antique Green (AG)
- White (WH)
- Antique Gold (AD)
- Moss Green (MG)
- Antique Silver (AS)
- Antique Copper (AC)





SEDGEFIELD



Sedgefield Frosted Glass

MODEL NUMBER


T201 - SEDGEFIELD ALUMINIUM REFELCTOR
T202 - SEDGEFIELD BRASS DISC

SPECIFICATIONS

- HOUSING :** LM 6 die cast aluminium.
- LIGHT SOURCE :** The fitting is designed to operate a range of Compact Fluorescent lamps up to 2 x 26W or ES LED lamps.
- DIFFUSER :** Standard frosted glass. Special clear glass or sandblasted glass.
- REFLECTORS :** Aluminium or brass disc.
- FINISH :** Powder coated and paint technique.
- MOUNTING :** Wall mounted.
- CONTROL GEAR :** Electronic or magnetic control gear. The electronic supply is suitable for operation with 220 – 240 volts. 50 hertz single phase.
- FASTENERS :** All external screws are stainless steel.
- INGRESS PROTECTION :** IP 44.
- MECHANICS :** Operating Temperature (T_a) ≤ 36° C.
Weight : 6 Kg including control gear.

APPLICATION AREAS

Indoor or outdoor application.
Commercial Developments.
Retail Developments.
Shopping malls.
Public buildings.
Residential Developments.




LIGHT SOURCE

Lamp	Wattage	Base
LED	Lamp specification	ES
CFL	2 x 13W, 2 x 18W or 2 x 23W	E27
	2 x 13W, 2 x 18W or 2 x 26W	G24

COLOURS


- Black (BL)
- Antique Green (AG)
- White (WH)
- Antique Gold (AD)
- Moss Green (MG)
- Antique Silver (AS)
- Antique Copper (AC)

DIMENSIONS IN MM

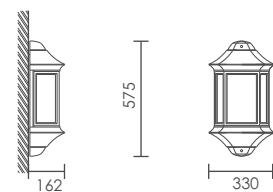

Side View

Front View

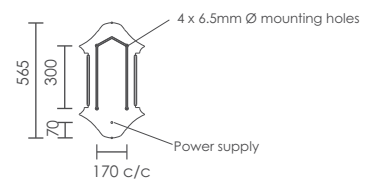

Mounting Plate Detail



Sedgefield Clear Glass





WESTCLIFF

MODEL NUMBER

T209 - WESTCLIFF ALUMINIUM REFLECTOR
 T211 - WESTCLIFF BRASS DISC

SPECIFICATIONS

HOUSING : LM 6 die cast aluminium.
LIGHT SOURCE : The fitting is designed to operate a range of Compact Fluorescent lamps up to 26W or ES LED lamps.
DIFFUSER : Standard frosted glass. Special clear glass or sandblasted glass.
REFLECTORS : Aluminium or brass disc.
FINISH : Powder coated and paint technique.
MOUNTING : Wall mounted.
CONTROL GEAR : Electronic or magnetic control gear. The electronic supply is suitable for operation with 220 – 240 volts. 50 hertz single phase.
FASTENERS : All external screws are stainless steel.
INGRESS PROTECTION : IP 44.
MECHANICS : Operating Temperature (T_a) ≤ 36° C.
 Weight : 5 Kg including control gear.




Westcliff Frosted Glass

LIGHT SOURCE


Lamp	Wattage	Base
LED	Lamp specification	ES
CFL	13W, 18W or 23W	E27
	13W, 18W or 26W	G24

APPLICATION AREAS

Indoor or outdoor application.
 Commercial Developments.
 Retail Developments.
 Shopping malls.
 Public buildings.
 Residential Developments.




DIMENSIONS IN MM

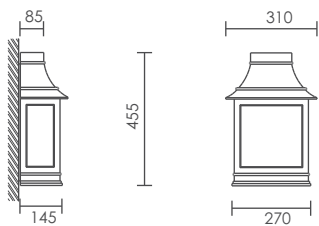

Side View

Front View

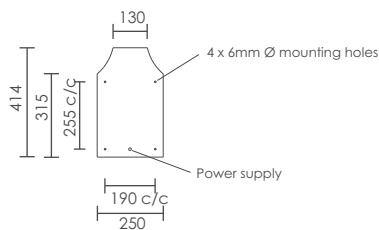

Mounting Plate Detail

COLOURS

- Black (BL)
- Antique Green (AG)
- White (WH)
- Antique Gold (AD)
- Moss Green (MG)
- Antique Silver (AS)
- Antique Copper (AC)



Westcliff Clear Glass





WESTCLIFF MINI



Westcliff Mini Frosted Glass

MODEL NUMBER


- T212 - WESTCLIFF MINI ALUMINIUM REFLECTOR
- T214 - WESTCLIFF MINI BRASS DISC

SPECIFICATIONS

- HOUSING** : LM 6 die cast aluminium.
- LIGHT SOURCE** : The fitting is designed to operate a range of Compact Fluorescent lamps up to 18W or ES LED lamps.
- DIFFUSER** : Standard frosted glass. Special clear glass or sandblasted glass.
- REFLECTORS** : Aluminium or brass disc.
- FINISH** : Powder coated and paint technique.
- MOUNTING** : Wall mounted.
- CONTROL GEAR** : Electronic or magnetic control gear. The electronic supply is suitable for operation with 220 – 240 volts. 50 hertz single phase.
- FASTENERS** : All external screws are stainless steel.
- INGRESS PROTECTION** : IP 44.
- MECHANICS** : Operating Temperature (T_a) ≤ 36° C. Weight : 2 Kg including control gear.

APPLICATION AREAS

- Indoor or outdoor application.
- Commercial Developments.
- Retail Developments.
- Shopping malls.
- Public buildings.
- Residential Developments.





COLOURS

- Black (BL)
- White (WH)
- Moss Green (MG)
- Antique Green (AG)
- Antique Gold (AD)
- Antique Silver (AS)
- Antique Copper (AC)

LIGHT SOURCE

Lamp	Wattage	Base
LED	Lamp specification	ES
CFL	13W or 18W	E27
	13W or 18W	G24

DIMENSIONS IN MM

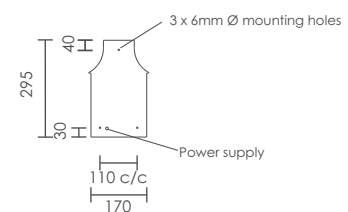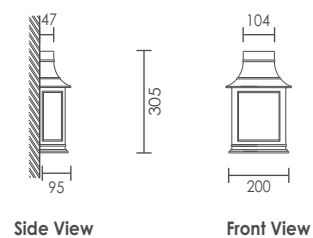

Mounting Plate Detail





YORK



MODEL NUMBER

C337 - YORK

SPECIFICATIONS

HOUSING : Extruded aluminium.

LIGHT SOURCE : The fitting is designed to operate a LED up to 42W.

DIFFUSER : Toughened glass or high impact acrylic.

FINISH : Powder coated.

MOUNTING : Wall mounted.

CONTROL GEAR : Electronic control gear. The electronic supply is suitable for operation with 220 – 240 volts. 50 hertz single phase.

FASTENERS : All external screws are stainless steel.

INGRESS PROTECTION : IP 55.

MECHANICS : Operating Temperature (Ta) ≤ 36° C.
Weight - 9Kg.


LIGHT SOURCE

LED

LED Current	Power (W)	Colour Temp	Nominal Flux (lm)
700mA	42W	4000K	4740 lm
		3000K	4410 lm

APPLICATION AREAS

- Indoor or outdoor application.
- Commercial developments.
- Retail developments.
- Shopping malls.
- Public buildings.
- Residential developments.



COLOURS

- Black (BL)
- White (WH)
- Matt Silver (MS)
- Charcoal Grey (CG)

DIMENSIONS IN MM

